

# Parameter introduction


NO.	Parameters		Remarks
1	Car size	Length ≤mm	5300
2		Width ≤mm	2000
3		Height ≤mm	1550
4		Weight ≤Kg	1800
5	Equipment Size	Length ≤mm	6500
6		Width ≤mm	5200
7		Height ≤mm	20749
8	Max. Retrieve Car Time	sec	140
9	Lifting Speedar Time	m/min	0-7.9
10	Power	3phases 5 wires; 50/60 HZ	
11	Motor	22KW	
12	Safety device:Light sensitive control		
13	Operation Control Mode:Button \IC card		

- 1.Vertical Rotary Parking System is designed to park 20 cars. Suitable parking quantity is 20 cars.
- 2.Perform standard “Vertical Rotary Type of Mechanical Parking Equipment” JB/T10215-2000


7	PCX10D-07	Large chain	2	
6	PCX10D-06	Car tray assembly	20	
5	PCX10D-05	Electrical mounting bracket	1	
4	PCX10D-04	Anti-swing rail mounting bracket	1	
3	PCX10D-03	Anti-swing rail	1	
2	PCX10D-02	Transmission section	1	
1	PCX10D-01	Combined frame assembly	1	
NO	Drawing number	name	Quantity	Remarks
		Assembly drawing		MUTRADE INDUSTRIAL CORP.
				PCX20D

通用件登记  
 描图  
 校描  
 旧底图总号  
 签字  
 日期



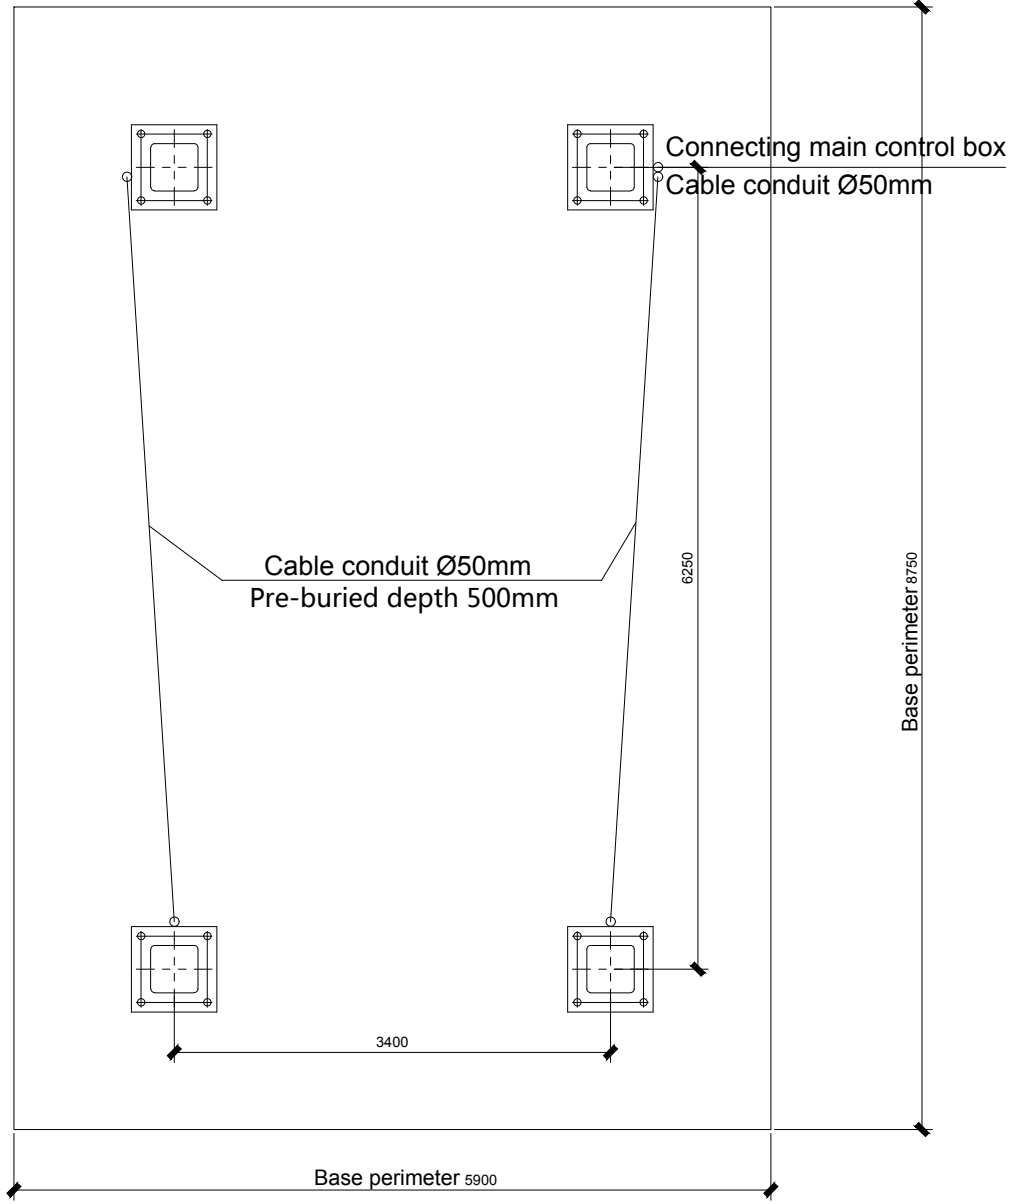


Direction of Parking In  
and Retrieving out




**Vertical Rotary  
Parking System**

Embedded pipe plan for  
single equipment


MUTRADE INDUSTRIAL CORP.

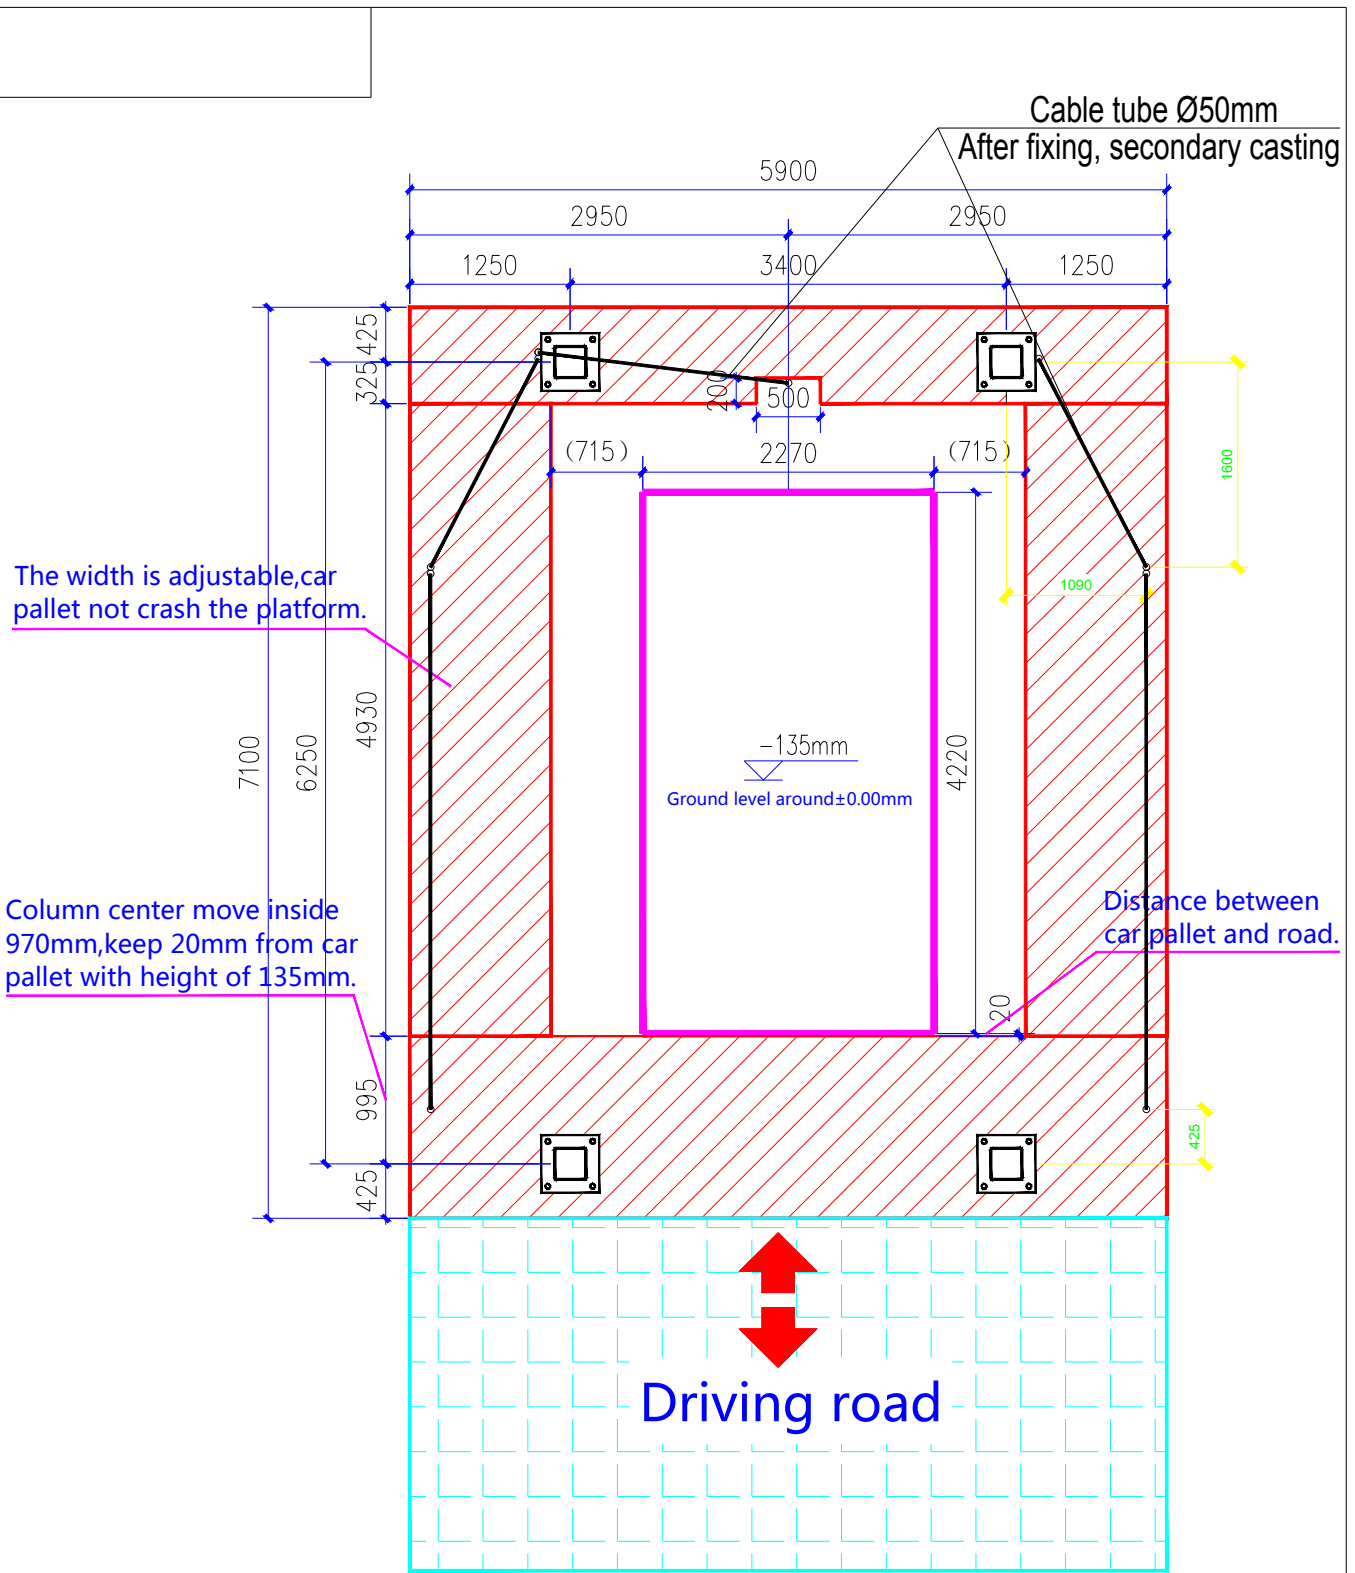

- Note :
- 1、 Red shadow is area of second pouring concrete ;
  - 2、 The difference in the internal ground level of the foundation should not be too large for drainage. ;
  - 3、 Ø50 After the tube is fixed, the second pouring is performed..

				Second pouring concrete layout of PCX14D-PCX20D				MUTRADE INDUSTRIAL CORP.			
								Vertical Rotary Parking System			